ALL DIMENSIONS IN INCHES

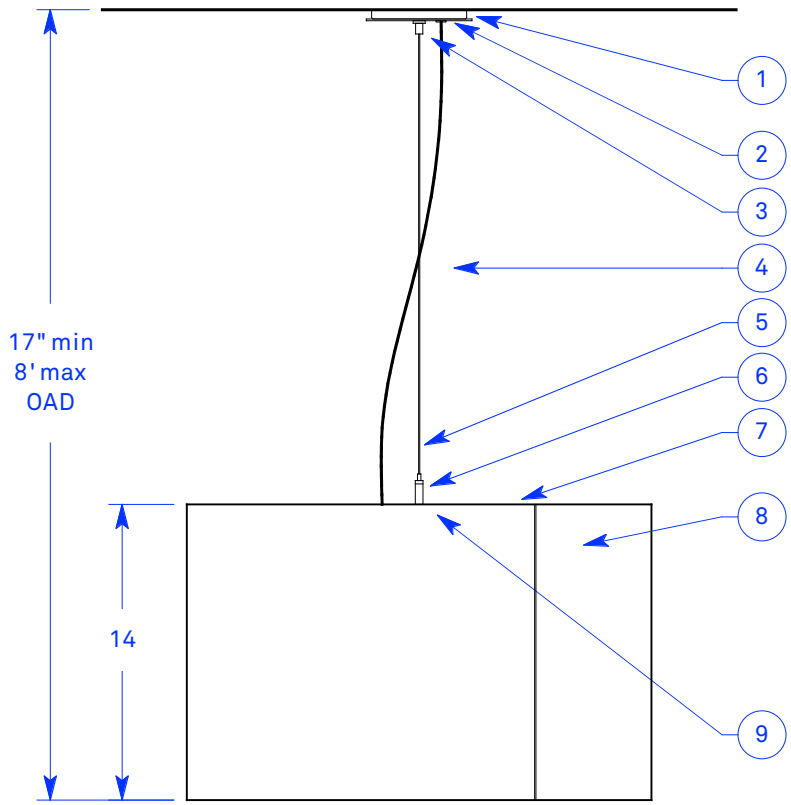

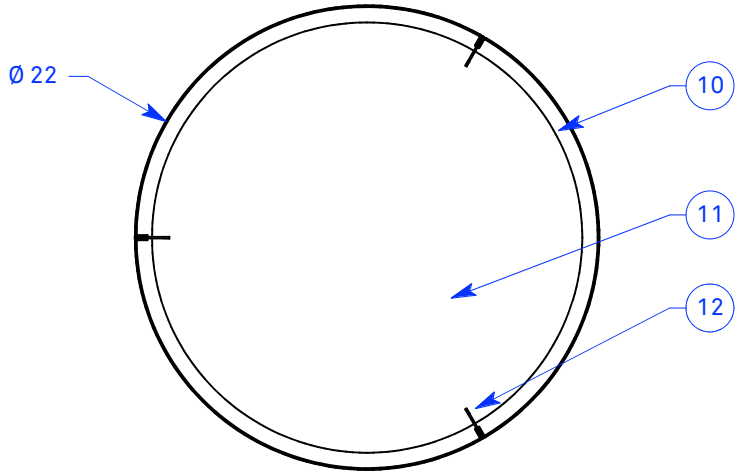

NOTES:

1. Ø 4.5" powder coated canopy
2. Ø 5" faceplate
3. Satin nickel plated suspension cable hardware
4. Clear jacket electrical cord
5. Stainless steel aircraft cable (field cut to length)
6. Nickel plated clutch cable grip with safety nut
7. White reflector
8. Carnegie Xorel fabric backed with high-impact copolymer sheet
9. 2x 3000K LED modules
10. Opal white inner diffuser
11. Opal white bottom diffusion disk
12. Powder coated spline

c UL US Damp Rated

Type:	Quantity:

Approval signature:

Name:

Firm:

Date:

Smith 22-14 Pendant

1% Dimming
Universal voltage

Driver configurations:

☐ **S22114T -** 18 watt LED, phase control dimming, 2654 source lumens, Osram driver: 79421
☐ **S22114O -** 32 watt LED, 0-10V dimming, 4210 source lumens Osram driver: 79442
☐ **S22114L-** 32 watt LED, Lutron dimming, 4210 source lumens Specify Lutron control system:

Finish options:

☐ **Silver**
☐ **Bronze**

Xorel fabric selection:

5.23.2016

RESOLUTE
4617 Colorado Ave. S, Unit A
Seattle, WA 98134
T 206.343.9323
F 888.346.8079
info@resoluteusa.com