



ALL DIMENSIONS IN INCHES

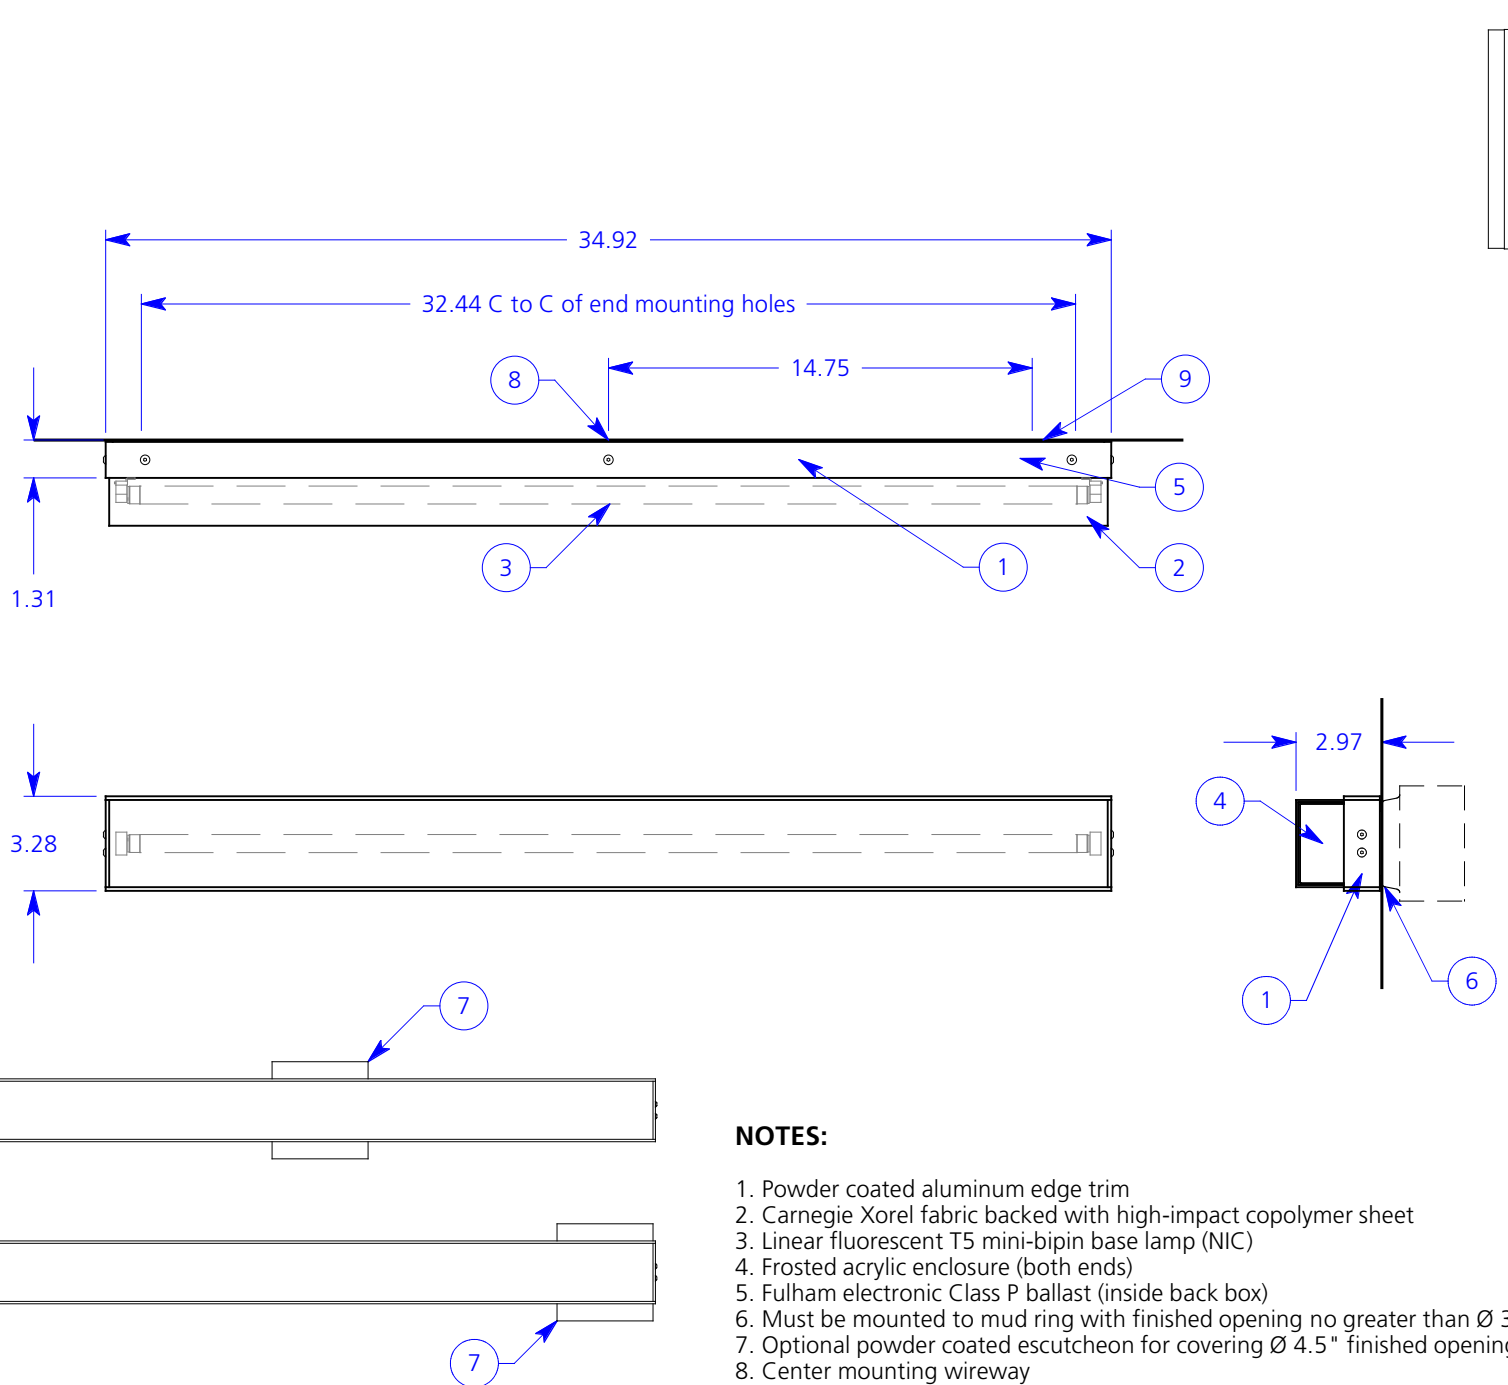

**NOTES:**

1. Powder coated aluminum edge trim
2. Carnegie Xorel fabric backed with high-impact copolymer sheet
3. Linear fluorescent T5 mini-bipin base lamp (NIC)
4. Frosted acrylic enclosure (both ends)
5. Fulham electronic Class P ballast (inside back box)
6. Must be mounted to mud ring with finished opening no greater than Ø 3.125"
7. Optional powder coated escutcheon for covering Ø 4.5" finished opening
8. Center mounting wireway
9. End mounting wireway 14.75" from center

Type:	Quantity:
-------	-----------

Approval signature:

Name:

Firm:

Date:

**Smith 36 Wall**  
 Dedicated voltage  
 39 watt HO linear fluorescent

- Finish options:**
- S36-39**  
 silver powder coat  
 silver mounting screws
  - S36B-39**  
 bronze powder coat  
 black mounting screws

- Fixture options:**
- BJC** - Escutcheon

- Voltage options:**
- 120 volt** - WH4-120-L
  - 277 volt** - WH4-277-L

- Stock fabric options:**
- 6615-20**, Flash Back
  - 6603-18**, Dash
  - 6603-16**, Dash
  - 6603-9**, Dash
  - 6619-92**, Quarry
  - 6619-99**, Quarry
  - 6427-226**, Meteor
  - 6427-708**, Meteor
  - 6427-720**, Meteor
  - 6427-721**, Meteor

**COM:**

**RESOLUTE**  
 4660 Ohio Ave. S, Unit C  
 Seattle, WA 98134  
 T 206.343.9323  
 F 888.346.8079  
 info@resoluteusa.com

