


ALL DIMENSIONS IN INCHES

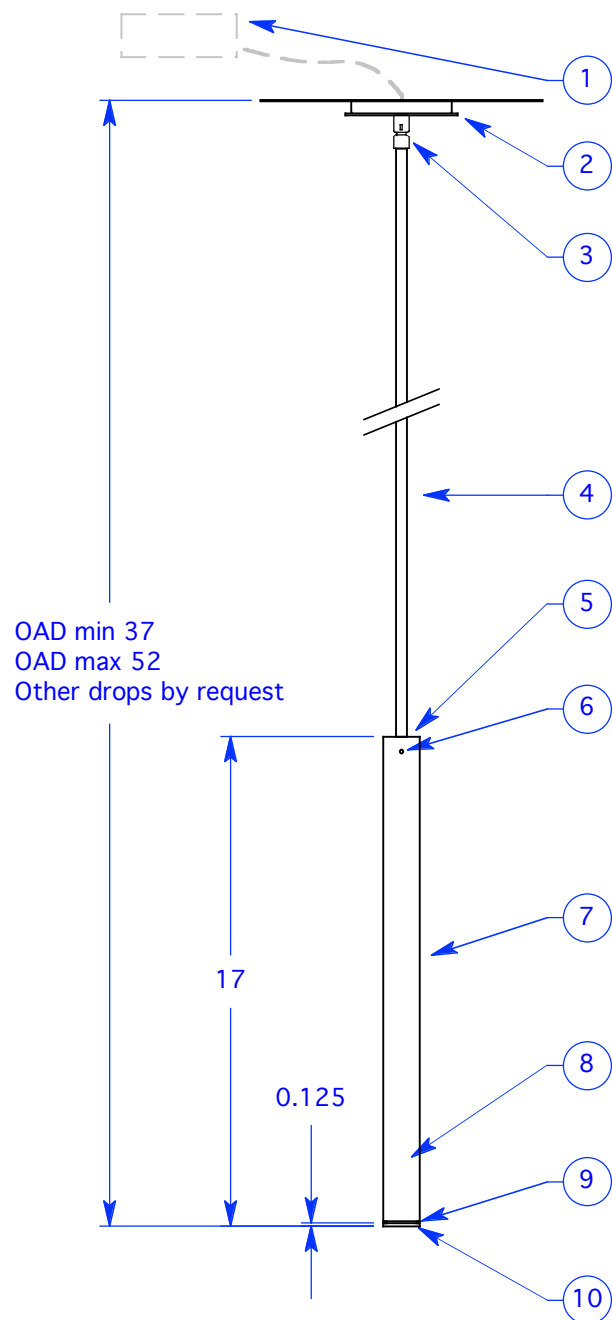

NOTES:

1. Remote mount 1% dimming 0-10V LED driver
2. Ø 3.5" matte black powder coated canopy with Ø 3.875" brass faceplate, patinated to specification
3. Brass hang straight, finish to match stem
4. Ø .375" brass stem, patinated to specification
5. Brass plug patinated to match fixture head or stem, slides along stem to field set overall drop with set screws
6. Set screw, loosen to separate brass plug from fixture head
7. Ø 1.25" brass fixture head, patinated to specification
8. 2700K 95 CRI LED module, other color temperatures available by request
9. .063" gap between fixture head and trim ring
10. Polished brass trim ring pinned to fixture head with three pins

Type:	Quantity:
Approval signature:	
Name:	
Firm:	
Date:	
Fabrizio Pendant Model: FAB 1% dimming driver 3.7 Watt 2700K 95 CRI 148 lumens	
Electronics option: <input type="checkbox"/> Remote fixture control via Lutron PowPak and Pico switch	
Lamp beam spread options: <input type="checkbox"/> Narrow <input type="checkbox"/> Medium <input type="checkbox"/> Wide	
Drawn by: MLSM Date: 11.16.23 Revision: Revision Date:	
RESOLUTE 4617 Colorado Ave. S, Unit A Seattle, WA 98134 T 206.343.9323 F 888.346.8079 info@resoluteusa.com	

