


# ASSEMBLY INSTRUCTIONS

## LINTEL LED

### Fixture assembly

1. Determine the appropriate cable mount locations on the ceiling.
2. Secure the cable ceiling plates in place with appropriate hardware.
3. Insert the cut end of the aircraft cable into the cable grip and push through the exit hole.
4. Level and adjust the lamp chassis to the desired height by pushing the cable grip center to release.
5. With the shade supported from below, raise to the chassis tipped at a forward angle to pass over the chassis, level and lower into place resting on the chassis rim.
6. Trim excess cable length.

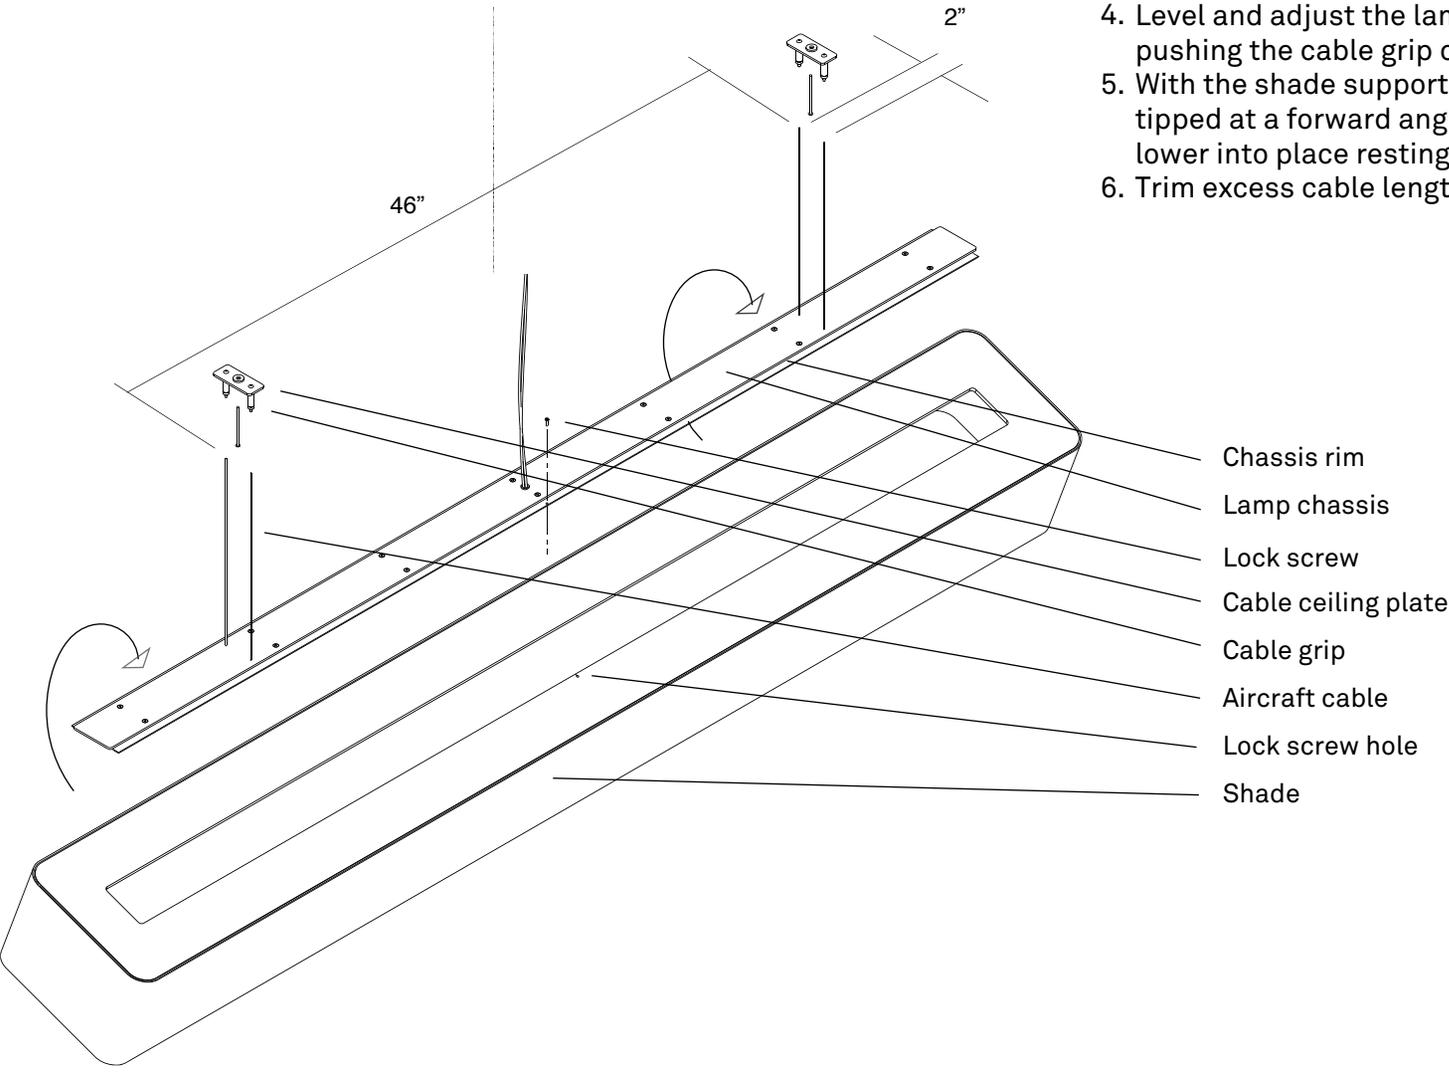


**RESOLUTE**

RESOLUTE is a registered trademark of  
MANIFESTO Corporation, Seattle WA  
[www.resoluteonline.com](http://www.resoluteonline.com) [info@resoluteusa.com](mailto:info@resoluteusa.com)




# ASSEMBLY INSTRUCTIONS

## STANDARD PENDANT

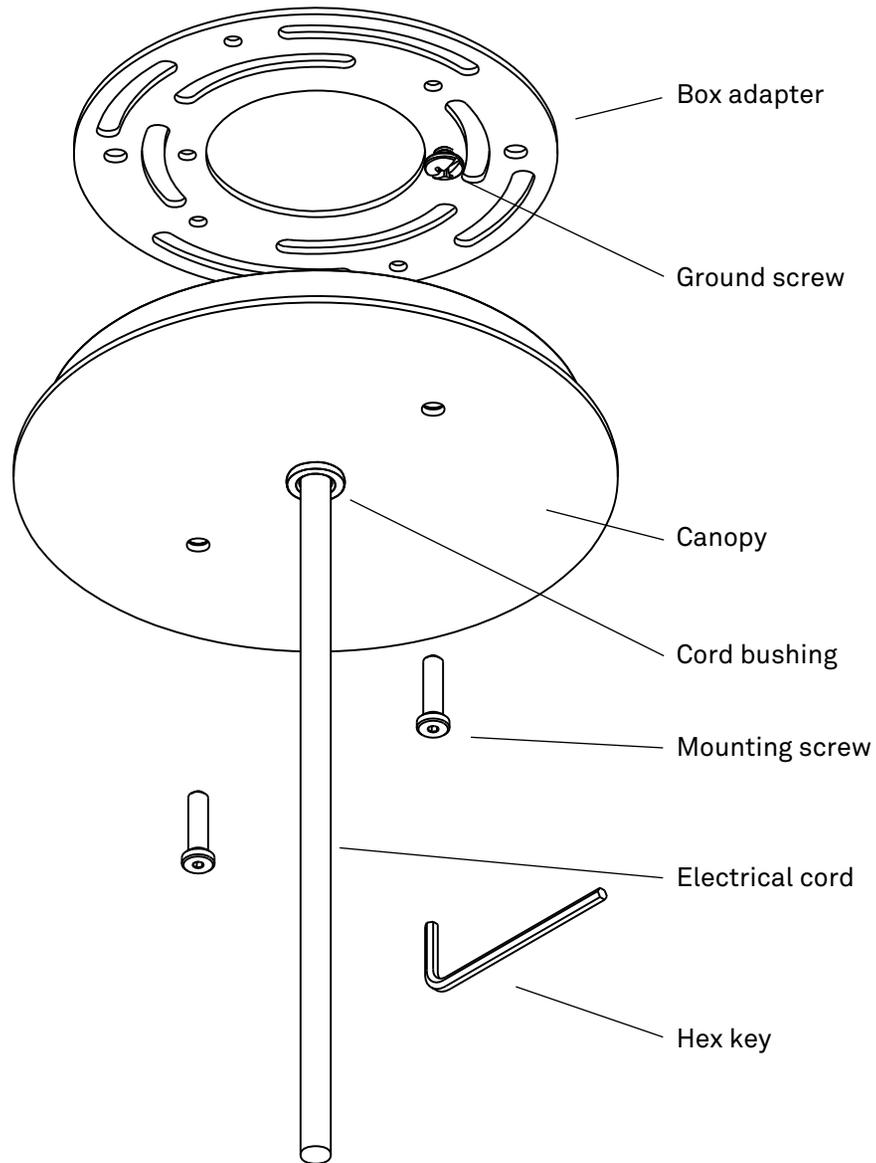

**Make certain power is off before you begin.**

1. Determine drop length. Measure, trim and strip electrical cord to the appropriate length.
2. Attach box adapter to the junction box.
3. Feed cord through cord bushing and strain relief (with set screw backed out for clearance) in canopy assembly.
4. Make electrical connections per wiring diagram.
5. Tighten set screw in the strain relief to secure electrical cord when desired drop length has been achieved.
6. Affix canopy to the junction box/box adapter assembly with the two mounting screws provided.

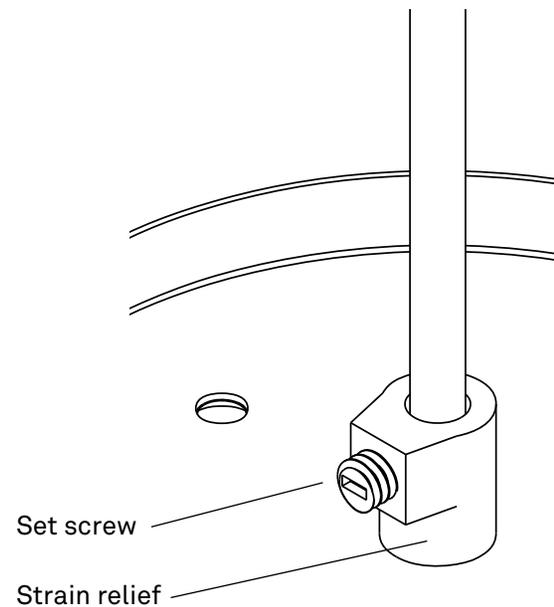


# RESOLUTE

RESOLUTE is a registered trademark of MANIFESTO Corporation  
4617 Colorado Avenue South, Unit A, Seattle WA 98134  
[www.resoluteonline.com](http://www.resoluteonline.com) [info@resoluteusa.com](mailto:info@resoluteusa.com)



0-10V Magnitude Solodrive 1% dimming driver with integral junction box: CVD96L24DC

Case size:  
12.25" x 2.38" x 1.38"

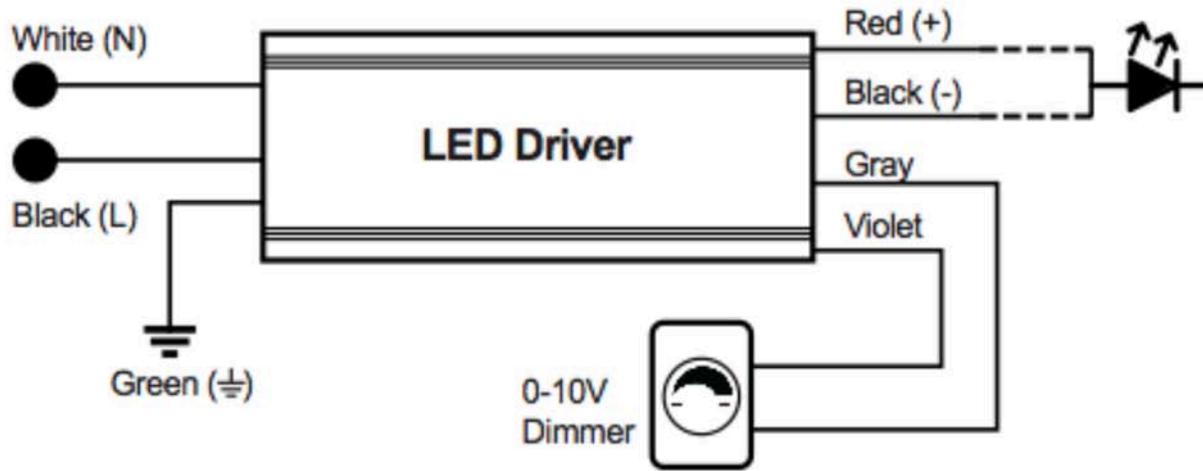

Type: Quantity:

Approval signature:

Name:

Firm:


Date:

**Remote LED Driver  
Wiring Diagrams**

Drivers must be installed in accordance with Article 450 of the National Electric Code. Please note that these drivers are large; appropriate space and access to the driver must be made prior to installation.

Lutron EcoSystem Hi-lume Premier .1% dimming driver with Fade-to-Black and integral junction box: L3D0-96W24V-U

Case size:  
10.5" x 5.5" x 2"

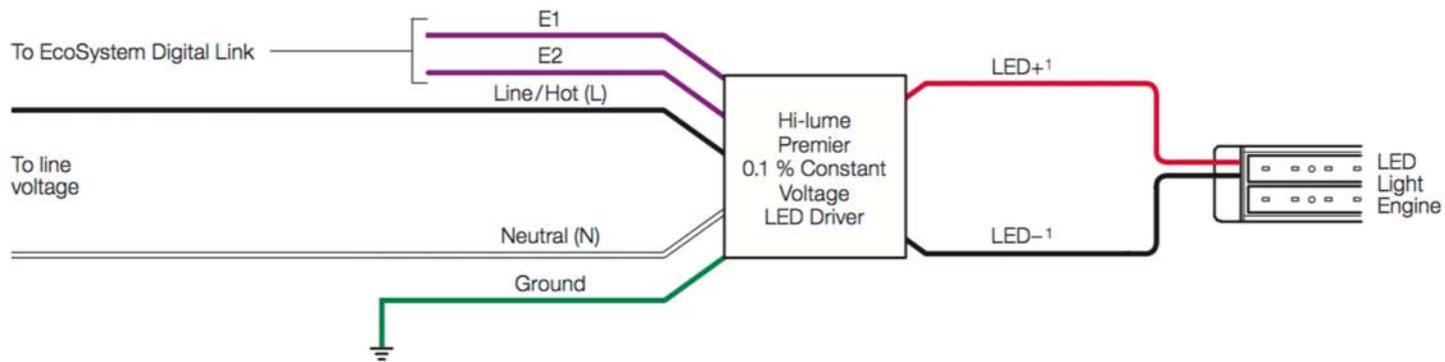

8.16.18

**RESOLUTE**

4617 Colorado Ave. S, Unit A  
Seattle, WA 98134  
T 206.343.9323  
F 888.346.8079  
info@resoluteusa.com