



ALL DIMENSIONS IN INCHES

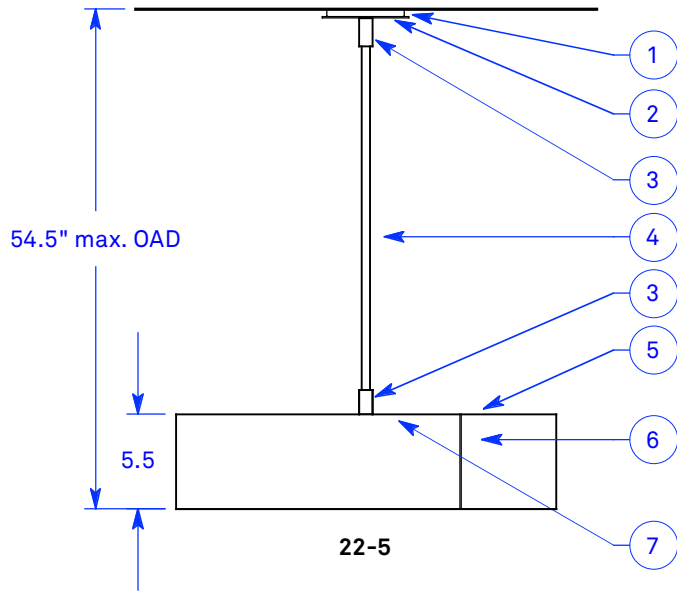


22-5

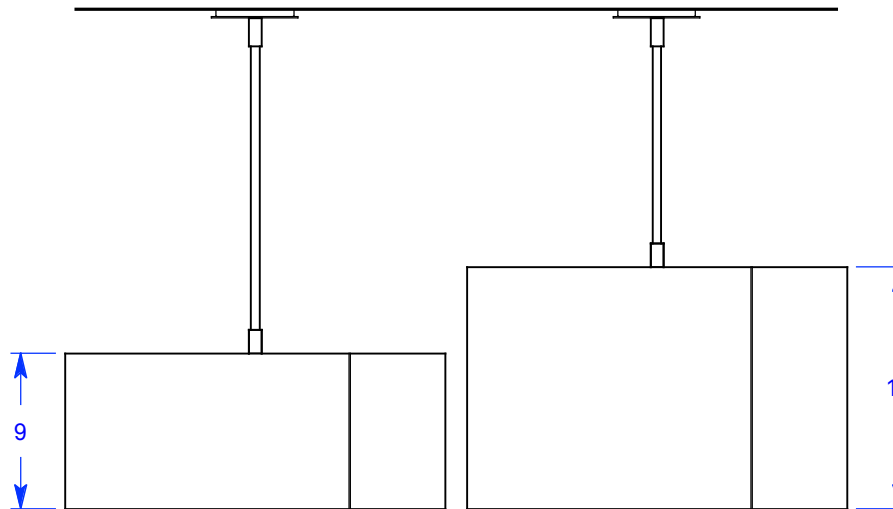

22-9

22-14

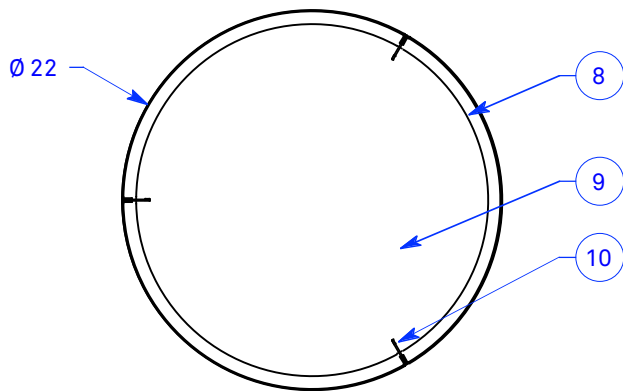

**NOTES:**

1. Ø 4.5" powder coated canopy
2. Ø 5" faceplate
3. Aluminum coupler for field cut stem
4. Ø .5" aluminum stem (field cut to length)
5. White reflector
6. Carnegie Xorel fabric backed with high-impact copolymer sheet
7. 2x 3000K LED modules
8. Opal white inner diffuser
9. Opal white bottom diffusion disk
10. Powder coated spline

Type: Quantity:

Approval signature:

Name:

Firm:

Date:

**Smith 22 Rigid Drop**  
32 Watt LED, 1% Dimming

**Shade configurations:**

- 22-5
- 22-9
- 22-14

**Driver configurations:**

- 0-10V dimming, 4210 source lumens, universal voltage
- Lutron EcoSystem dimming, 4210 source lumens, universal voltage
- Lutron 2-wire phase control dimming, 4210 source lumens, 120 volts

**Finish options:**

- Silver
- Bronze

**Xorel fabric selection:**

5.20.2019

**RESOLUTE**

4617 Colorado Ave. S, Unit A  
Seattle, WA 98134  
T 206.343.9323  
F 888.346.8079  
info@resoluteusa.com

