



ALL DIMENSIONS IN INCHES

B24 ADA Wall

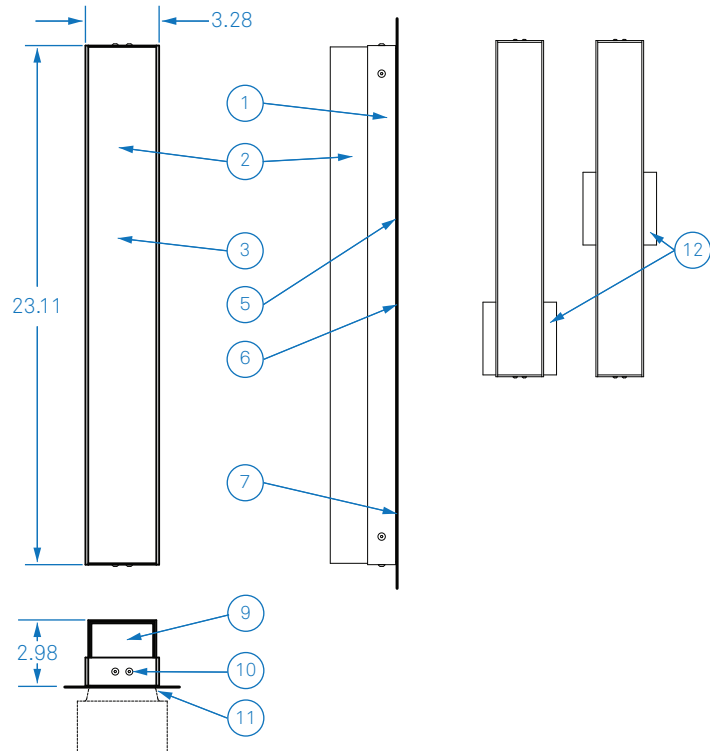

B36 ADA Wall

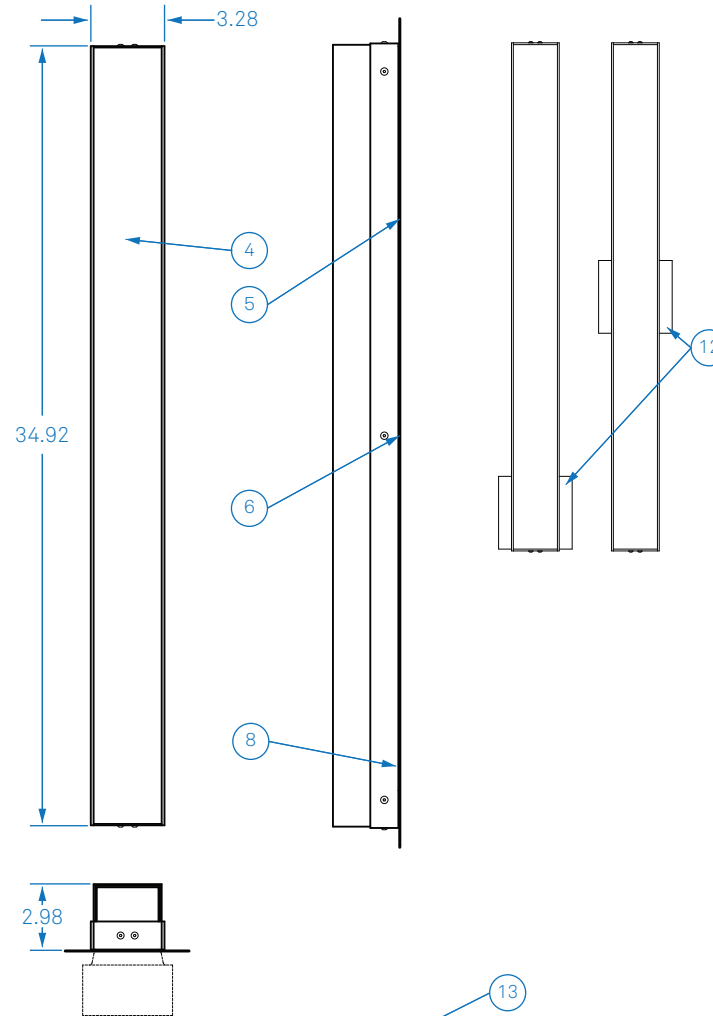

NOTES:

1. Powder coated edge trim
2. Carnegie Xorel fabric backed with high-impact copolymer sheet
3. 2x 90+ CRI LED modules, 2268 total source lumens at 3000K, other color temperatures available upon request
4. 3x 90+ CRI LED modules, 3449 total source lumens at 3000K, other color temperatures available upon request
5. Dimming driver inside back box
6. Center mounting wireway
7. End mounting wireway 8.8" from center
8. End mounting wireway 14.75" from center
9. Opal white high-impact copolymer inner diffuser and end closures
10. Fasteners are bright stainless with silver trims; blackened with bronze trims
11. Both fixture types must be mounted to mud ring with finished opening no greater than \varnothing 3.125"
12. Optional powder coated escutcheon for covering \varnothing 4.5" finished opening
13. Fixtures may be mounted vertically or horizontally

Type:	Quantity:
Approval Signature:	
Specifier:	
Date:	
B24 ADA Wall <input type="checkbox"/> Model SB240, SB24L 15 Watt LED 1% Dimming	
B36 ADA Wall <input type="checkbox"/> Model SB360, SB36L 22.5 Watt LED, 1% Dimming	
Driver configurations: <input type="checkbox"/> 0-10V dimming, universal voltage <input type="checkbox"/> Lutron EcoSystem dimming, universal voltage <input type="checkbox"/> Lutron 2-Wire phase control dimming, 120 volts	
Hardware finish: <input type="checkbox"/> Matte silver <input type="checkbox"/> Bronze	
Fixture options: <input type="checkbox"/> BJC - Escutcheon	
Xorel fabric selection:	
<input style="width: 100%;" type="text"/>	
9.13.21	
<h1>RESOLUTE</h1>	
4617 Colorado Ave. S, Unit A Seattle, WA 98134 T 206.343.9323 info@resoluteusa.com	

