



ALL DIMENSIONS IN INCHES

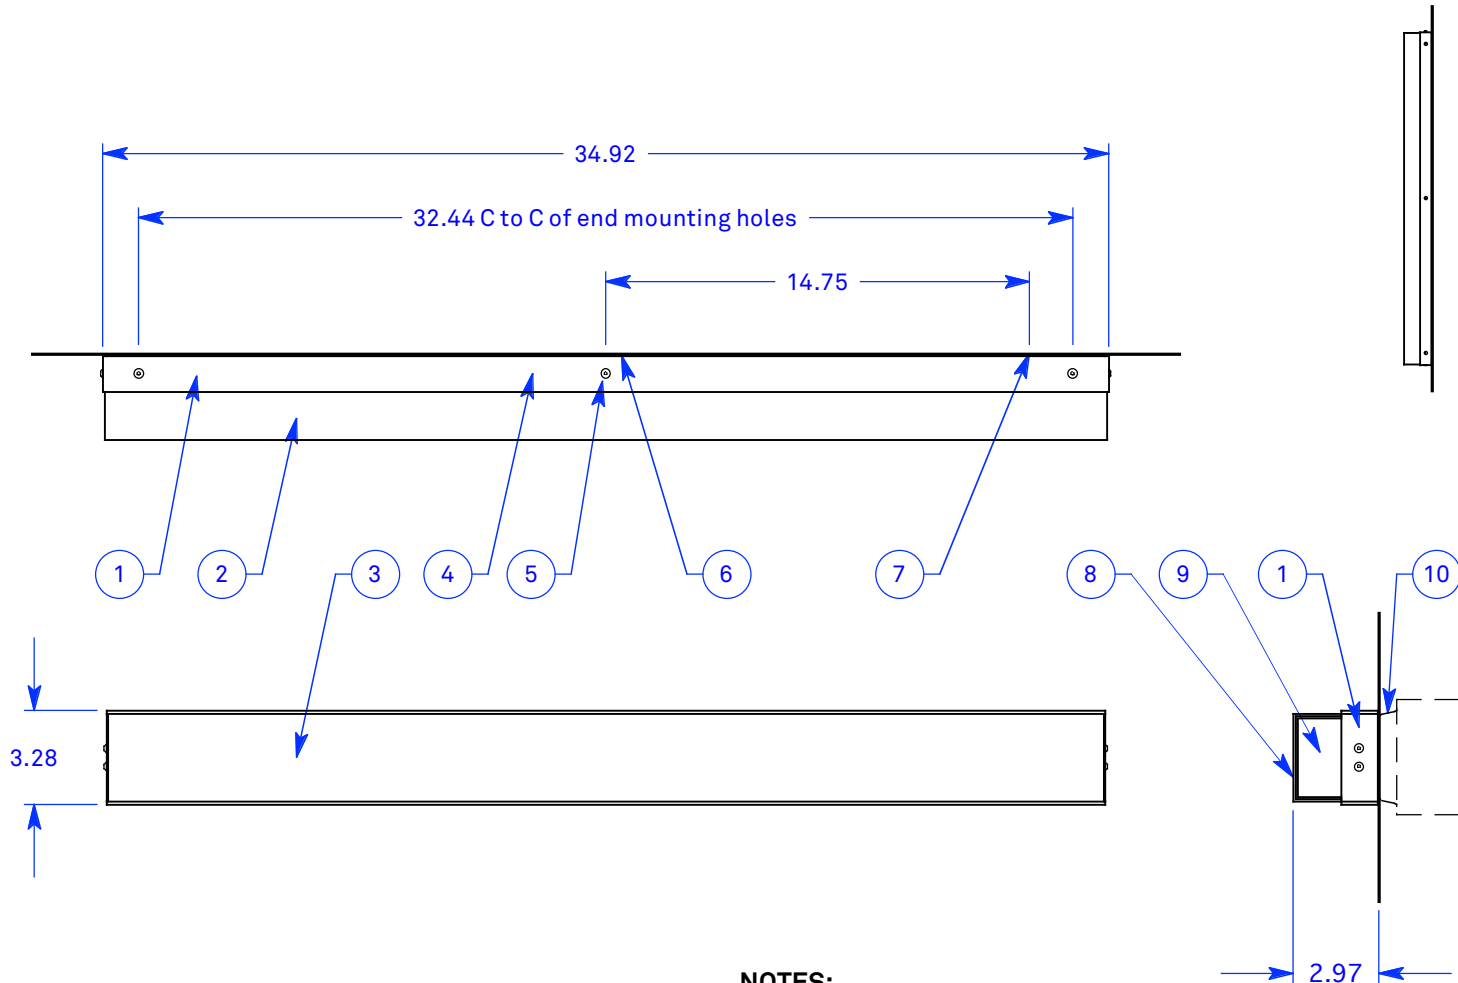

NOTES:

1. Powder coated edge trim
2. Carnegie Xorel fabric backed with high-impact copolymer sheet
3. 3x 3000K LED modules
4. Dimming driver inside back box
5. Fasteners
6. Center mounting wireway
7. End mounting wireway 14.75" from center
8. Opal white inner diffuser
9. Frosted high-impact copolymer enclosure (both ends)
10. Must be mounted to mud ring with finished opening no greater than \varnothing 3.125"
11. Optional powder coated escutcheon for covering \varnothing 4.5" finished opening

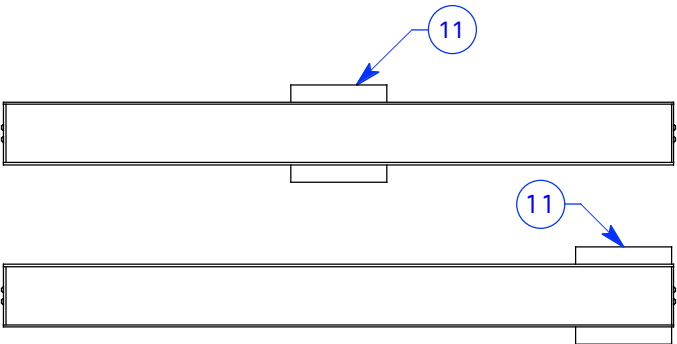

Type: Quantity:

Approval signature:

Name:

Firm:

Date:

Smith 36 Wall/Ceiling
22.5 Watt LED, 1% Dimming

Driver configurations:

- SB360** - 0-10V dimming, 3473 source lumens, universal voltage
- SB36L**- Lutron EcoSystem dimming, 3473 source lumens, universal voltage
- SB36L**- Lutron 2-wire phase control dimming, 3473 source lumens, 120 volts

Finish options:

- Silver
- Bronze

Fixture options:

- BJC** - Escutcheon

Xorel fabric selection:

5.20.2019

RESOLUTE

4617 Colorado Ave. S, Unit A
Seattle, WA 98134
T 206.343.9323
F 888.346.8079
info@resoluteusa.com

