ALL DIMENSIONS IN INCHES

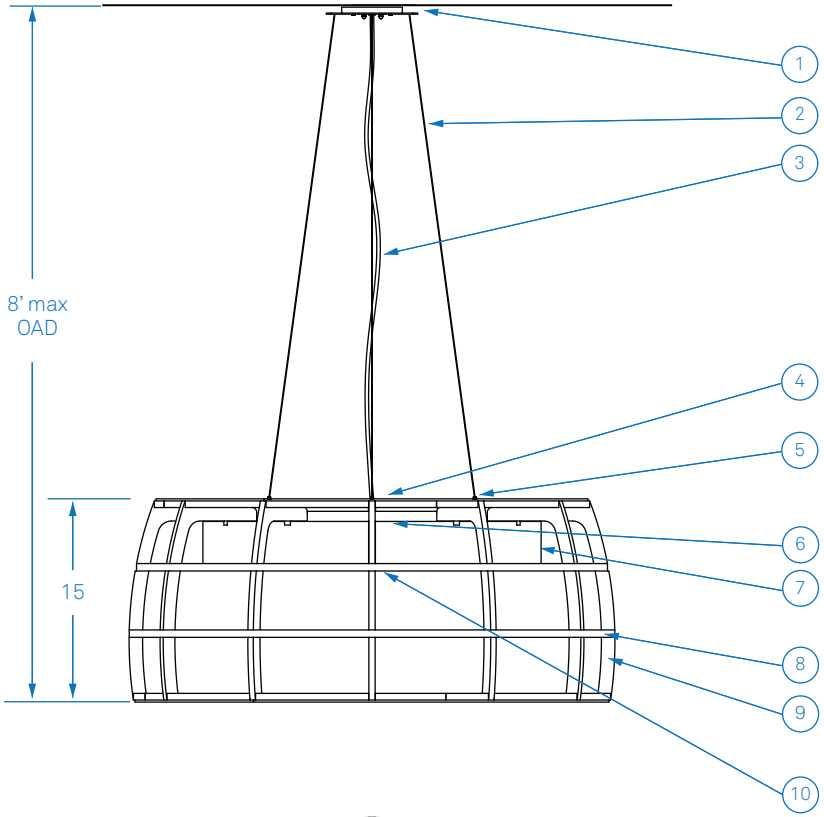

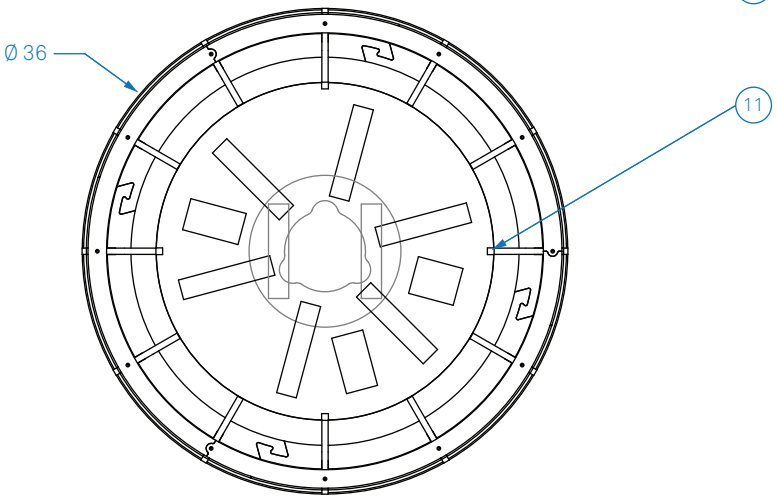

NOTES

1. Matte silver powder coated Ø 4.5" canopy
   Lustre finished Ø 7.5" faceplace, with electrical connection access door
2. Stainless steel aircraft cable (field cut to length)
3. Clear jacket electrical cord (field cut to length)
4. Optional 3000K LED uplight module,
   up to 2832 source lumens, other color temperatures available upon request
5. Nickel plated clutch cable grip with safety nut
6. 6x 3000K LED downlight modules,
   up to 10456 total source lumens, other color temperatures available upon request
7. Side diffusion: opal white high-impact copolymer
8. Oak wood bands, Summer Oak finish
9. FSC Certified 12mm okoume plywood structure
   Summer Oak finish
10. Bottom diffuser: Sail clothe
11. Matte white diffusion disk retaining tabs

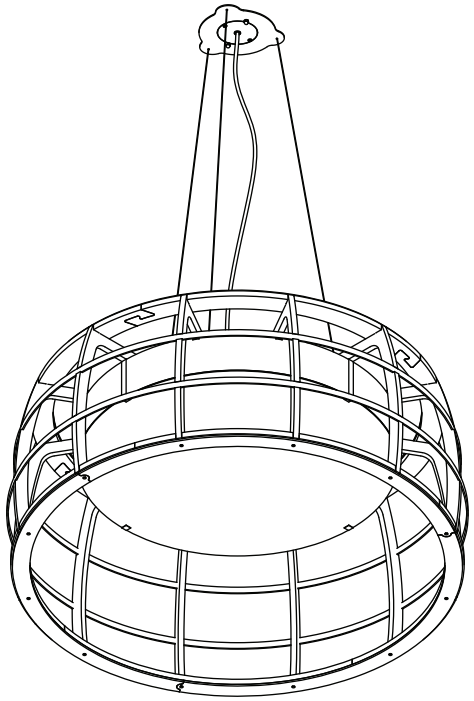

c UL US Damp Rated

Type:	Quantity:

Approval Signature:

Name:

Specifier:

Date:

Mosquito

Model M36
1% Dimming

Driver Configurations:

- ☐ Lutron EcoSystem dimming, universal voltage
- ☐ 0-10V dimming, universal voltage
- ☐ Lutron 2-wire phase control dimming, 120 volts

Fixture Options

- ☐ Uplight
- ☐ Wireless Control, Lutron Pow Pak
- ☐ Cloth covered cord

Xorel Fabric Selection

8.31.20

RESOLUTE
4617 Colorado Ave. S, Unit A
Seattle, WA 98134
T 206.343.9323
info@resoluteusa.com