

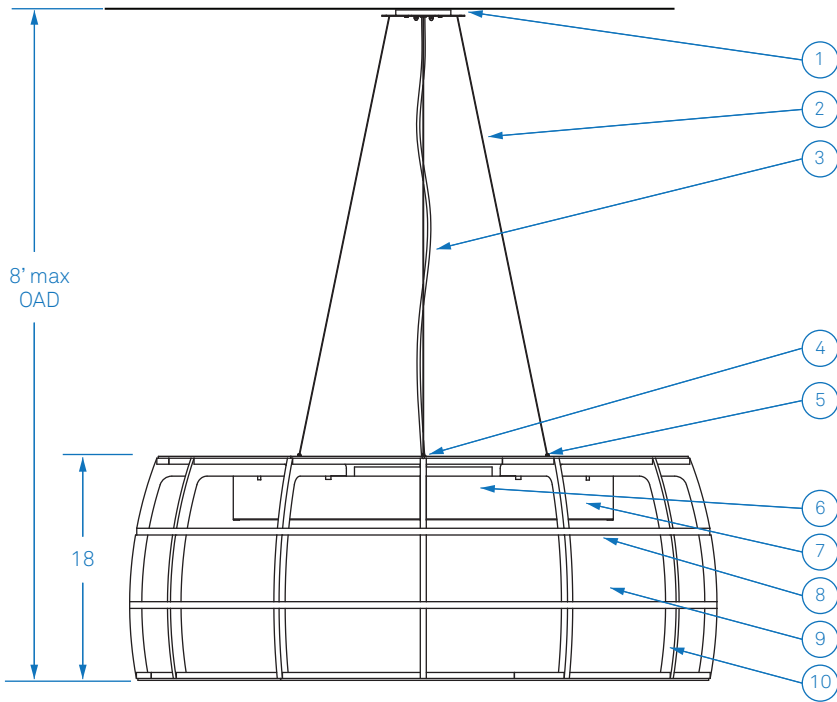


ALL DIMENSIONS IN INCHES

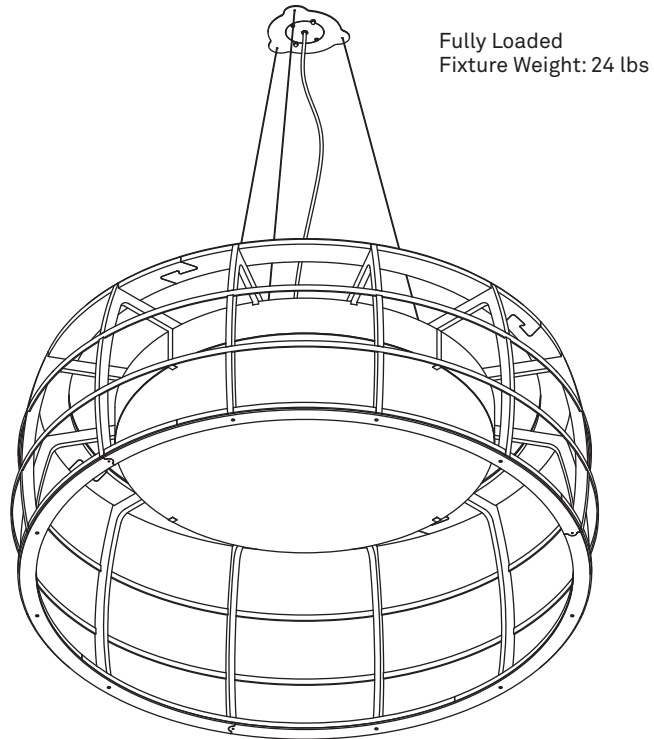

NOTES

1. Matte silver powder coated Ø 4.5" canopy, Lustre finished Ø 7.5" (around lobes) faceplate with electrical connection access door
2. Stainless steel aircraft cable (field cut to length)
3. Clear jacket electrical cord (field cut to length)
4. Optional 3000K 90+ CRI LED uplight module, 2595 source lumens, other color temperatures available upon request
5. Nickel plated clutch cable grip with safety nut
6. LED capsule containing 8x 3000K 90+ CRI LED downlight modules, 10384 total source lumens, other color temperatures available upon request
7. Side diffusion: opal white high-impact copolymer
8. Oak wood bands, Summer Oak finish
9. Carnegie Xorel fabric stretched over structure
10. FSC Certified 12mm okoume plywood structure, Summer Oak finish
11. Bottom diffuser: sailcloth
12. White diffusion disk retaining tabs

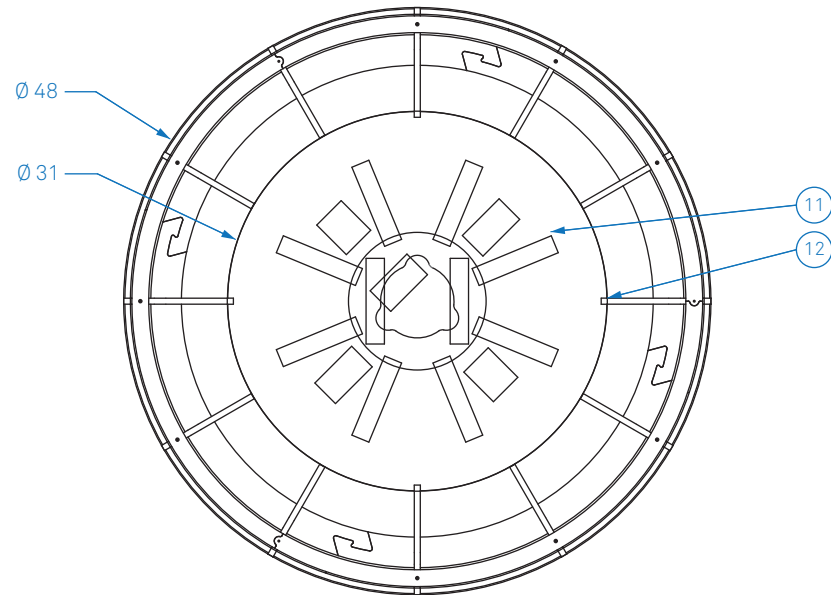

Type:	Quantity:
Approval Signature:	
Name:	
Specifier:	
Date:	
<p>Mosquito Ø 48"</p> <p>Model M48 1% Dimming 78 Watts 98 Watts with uplight module</p>	
<p>Driver Configurations:</p> <p><input type="checkbox"/> Lutron EcoSystem dimming, universal voltage</p> <p><input type="checkbox"/> 0-10V dimming, universal voltage</p> <p><input type="checkbox"/> Lutron 2-wire phase control dimming, 120 volts</p>	
<p>Fixture Options</p> <p><input type="checkbox"/> Uplight module</p> <p><input type="checkbox"/> Wireless control, Lutron Pow Pak</p> <p><input type="checkbox"/> Cloth covered cord</p>	
<p>Xorel Fabric Selection</p>	
01.06.21	
<p>RESOLUTE</p> <p>4617 Colorado Ave. S, Unit A Seattle, WA 98134 T 206.343.9323 info@resoluteusa.com</p>	